



SCRUBBER DRYERS GHIBLI

Series **5**



RUGGED, RELIABLE
AND EASY TO OPERATE





SCRUBBER DRYERS

designed to satisfy all types of cleaning jobs

Series **5**



Ergonomical at 360°; an easy to operate machine, steady and secure in every working condition.

Easy to access batteries located in the bottom in order to increase the stability.



The strong squeegee, governed by a parallelogram, is equipped with large bumper wheels.





1

1
Perfect visibility on all four sides simplifies the operator's work.

2
Easy accessibility to all the components of the machine for fast ordinary and extraordinary maintenance.

3
A strong frame, an easy to remove rear axle and a traction group, derived from truck-lift technology (with automatic speed reduction in curves), turn the S5 into a unique model in its range.

4
The intuitive control panel has a display for onboard diagnostic and check up of all the functions, a socket for cellular phone charging is also present.




large opening up to 68°

large and long drain pipes.

2

easy to remove side flaps

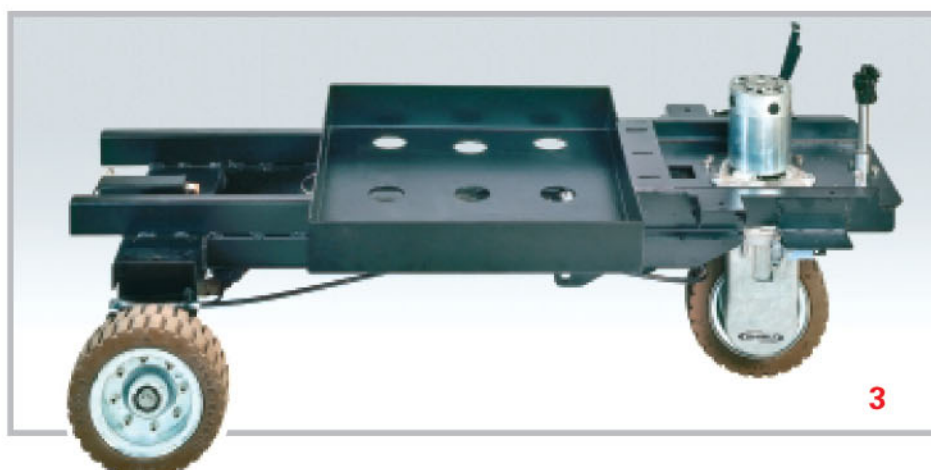

3



4



A large diameter cover for easy and fast filling of the solution tank.



A large range of PP and tyne brushes and of padholders equips the unit for any cleaning task.



The on board, monobloc computer follows up all the machine functions, is easy to substitute and allows the program to be personalized.

"Series 5" SCRUBBER DRYERS RANGE			
TECHNICAL FEATURES	Measurement units	150 S 75	150 S 85
Electronic performance control	---	Integrated	
Tension	V	36	36
Cleaning width	mm	750	850
Squeegee width	mm	950	1050
Squeegee actioning	---	With actuator	
Solution tank	l	150	150
Recovery tank	l	160	160
Vacuum	---	Sensors	
Water filter	---	Stainless steel	
Water pump (10 l/min) adjustable waterflow		Standard	
Brush qty - Ø	mm	2 x 385	2 x 440
Brush motor	Nr. - W	2 x 450	2 x 450
Brush speed	rpm	190	190
Brush pressure	---	Constant	
Motor traction (vertical)	W	800	800
Vacuum motor (3 stage)	V - W	36 - 570	36 - 570
Suction vacuum	mm H ₂ O	1500	1500
Advancement speed	Km / h	0 ÷ 6,0	0 ÷ 6,0
Diagnostic display	---	Standard	
Curve speed control	---	Automatic	
Working lights	---	Standard	
Rotating light (n° 2)	---	Standard	
Socket for cellular phone battery charging	---	Standard	
Adjustable ergonomical seat	---	Standard	
Recommended battery (gel)	V - Ah	6 V - 6 x 270 Ah (C 20 Ah)	
Dimensions (l-w-h)	mm	1680x760 x1280	1680x860 x1280



The working lights are standard. The traction motor and on board computer are easy to access and don't require specific knowledge.

